

Integra IT-8000

Niagara 4 Network Controller / Webserver

The Integra IT-8000 is a compact, embedded Internet of Things (IoT) controller and server platform for connecting multiple and diverse devices and sub-systems. With Internet connectivity and web-serving capability, the IT-8000 controller provides integrated control, supervision, data logging, alarming, scheduling and network management. It streams data and rich graphical displays to a standard Web browser via an Ethernet or wireless LAN, or remotely over the Internet.

The licensing model for the Integra IT-8000 controller is simplified and features standard drivers along with optional I/O and field bus expansion modules for ultimate flexibility and expandability. The Integra IT-8000 controller operates with Niagara 4, the latest version of the Niagara Framework®, for optimum performance. In larger facilities, multi-building applications and large-scale control system integrations, Niagara 4 Supervisors can be used with IT-8000 controllers to aggregate information, including real-time data, history, and alarms, to create a single, unified application.

With the simple configuration, tool-less installation, low-cost integration and high-powered performance, the Integra IT-8000 controller is a dramatic evolution in connecting and controlling devices worldwide.

HARDWARE SPECIFICATIONS

TI AM3352: 1000MHz ARM® Cortex™-A8
1GB DDR3 SDRAM
Removable micro-SD card with 4GB flash total storage/2GB user storage
Wi-Fi (Client or WAP) IEEE802.11a/b/g/n IEEE802.11n HT20 @ 2.4GHz IEEE802.11n HT20/HT40 @ 5GHz Configurable radio (Off, WAP, or Client) WPAPSK / WPA2PSK supported
USB type A connector Back-up and restore support
(2) isolated RS-485 with selectable bias and termination
(2) 10/100MB Ethernet ports
Secure boot
24 VAC/DC power supply
Runs Niagara 4.1 and later
Real time clock
Batteryless



EXPANSION MODULES

MAXIMUM EXPANSION MODULES SUPPORTED

NPB-8000-LON : 4
NPB-8000-232 : 4
NPB-8000-2X-485 : 2


MAXIMUM IO MODULES SUPPORTED

IT-IO-16-485 : 16

I/O CONFIGURATION

MAXIMUM COMBINATIONS

EXPANSION 1	EXPANSION 2	EXPANSION 3	EXPANSION 4
RS-232 or LON	RS-232 or LON	RS-232 or LON	232 or RS-LON
(2) RS-485	RS-232 or LON	RS-232 or LON	RS-232 or LON
(2) RS-485	(2) RS-485	RS-232 or LON	
(2) RS-485	(2) RS-485		

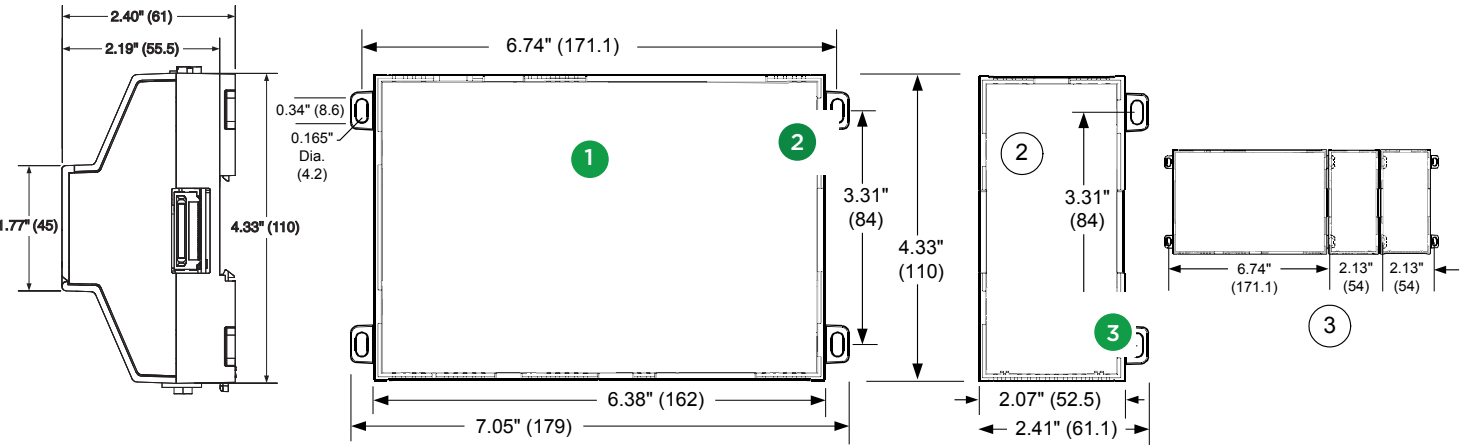

Compatible with (DIN43880) enclosures
 Suitable for mounting to a panel or to an EN50022 standard 35mm rail



Cylon Auto-Matrix
 One Technology Lane
 Export, PA 15632

(724) 733-2000

www.cylon-automatrix.com

Appropriate safety precautions must always be taken when operating or maintaining equipment connected to any Cylon Auto-Matrix product or other Licensed Materials or Hardware. Cylon Auto-Matrix assumes no responsibility or liability for any injuries or damage to any persons or property resulting from the use of these products. As always, these products should be used in the manner they are intended.

All trademarks, trade names, service marks, or logos contained herein are the property of their respective owners and are only used to describe the product(s) being listed in this document. Every effort has been made to properly capitalize, punctuate, and identify and attribute all required trademarks with the use of the appropriate ® or ™ wherever practical and possible. Cylon Auto-Matrix is not affiliated or a licensee holder of any of the trademarks other than those detailed below.

Cylon Auto-Matrix, Smart Building Solutions, Solution Integrator, the Rocket-A, and Integra are either registered trademarks or trademarks of Cylon Auto-Matrix.

© 2018 Cylon Auto-Matrix, A Cylon Energy Inc. Company

SPECIFICATIONS

AGENCY CERTIFICATIONS

- UL 916
- CE EN 61326-1
- FCC Part 15 Subpart B, Class B | FCC Part 15 Subpart C
- C-UL Listed to Canadian Standards Association (CSA) C22.2 No. 205-M1983 "Signal Equipment"
- 1999/5/EC R&TTE Directive
- CCC | SRRC | RSS | RoHS

ENVIRONMENTAL SPECIFICATIONS

- Operating Temperature : -20 to 60°C
- Storage Temperature: -40 to 85°C
- Humidity: 5% - 95% Non-condensing
- Shipping & Vibration: ASTM D4169, Assurance Level II
- MTTF: 10 years+

MOUNTING & DIMENSIONS

- IT-8000 controller. Allow at least 1.5" (38mm) clearance around all sides and minimum 3" (76mm) at bottom for Wi-Fi antenna
- Expansion module. Up to four (4) may be used. See "Expansion Modules" and "I/O Configuration"
- Distances between center tabs from one unit to another unit

Part No. 1E-05-00-0169